

GULF COAST PAINT MFG., INC.

CHEMICAL RESISTANT COATINGS FOR PETROLEUM REFINERIES

Gulf Coast Paint manufactures high performance coatings that have a proven track record in the Petrochemical industry. With over 100 years of combined technical experience, we have the knowledge to provide solutions in the Petrochemical industry.



PRODUCT LINE

- Chemical Resistant Epoxies
- Moisture Tolerant Coatings
 - UV Resistant Coatings
- Fast Drying and Low Temperature Curing Coatings
 - Concrete Containment Coatings

30075 County Road 44, Loxley, AL 36551

Phone: 251-964-7911

email: info@gulfcoastpaint.com

www.gulfcoastpaint.com

GULF COAST PAINT MFG., INC.

Key Products for Exteriors of Storage Tanks
and other Structural Steel: **CT-370 & MCU-100**



CT-370 Acrylic Aliphatic Urethane

- High solids, aliphatic urethane
- Excellent UV & gloss protection
- Non-chalking and non-yellowing
- Available in most colors and safety colors



MCU-100 Moisture Cured Urethane

- One component, moisture cured urethane
- Fast recoat, 1-2 hours
- High heat resistance, up to 400°F dry
- Excellent corrosion resistance
- Cures down to 18°F

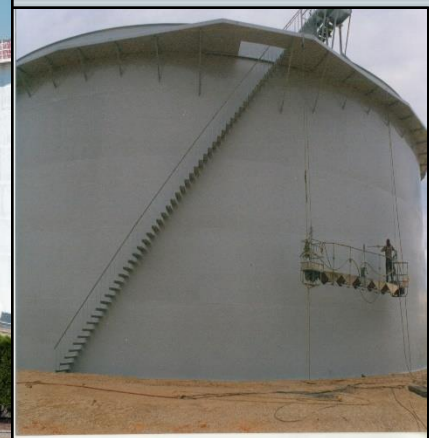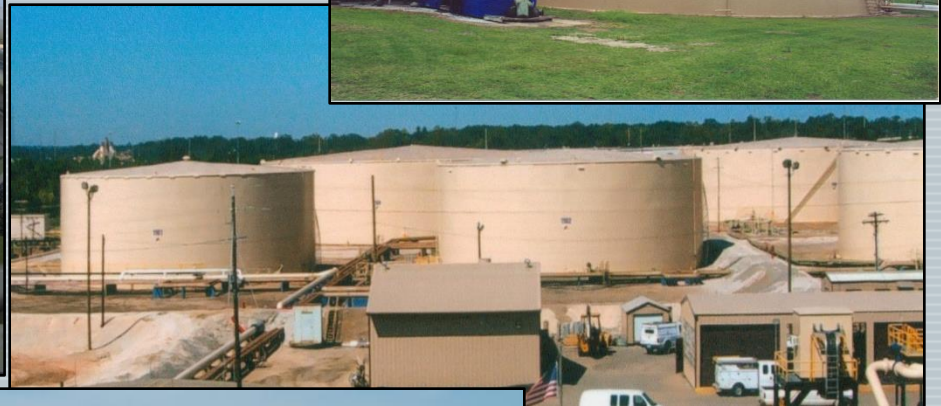

30075 County Road 49, Loxley, AL 36551

Phone: 251-964-7911

email: info@gulfcoastpaint.com

www.gulfcoastpaint.com

GULF COAST PAINT MFG., INC.

CHEMICAL RESISTANT COATINGS FOR PETROLEUM REFINERIES

Key Products for Tank Linings:

PC-517, PC-590/591, CM-15

Our corrosion resistant coatings and linings are developed to withstand the abuse in petrochemical processing. From internal tank linings to floating roofs, above ground and underground, we have the solutions to face these issues.

PC-517 Cycloaliphatic Epoxy


- 92% Solids – Low odor
- Self priming
- Excellent lining for crude oil storage tanks and aromatics
- May be applied on damp surfaces
- Cures down to 40°F (Low Temp Hardener cures down to 25°F)

CM-15 DTM Epoxy Mastic

- 82% Solids
- Self Priming
- Excellent lining for gasoline storage tanks
- Cured down to 40°F (Low Temp Hardener cures down to 25°F)

PC-590/591 Wet Surface Epoxy

- 100% Solids - No odor
- Can withstand H₂S
- May be applied underwater
- Cures down to 45°F
- Self Priming

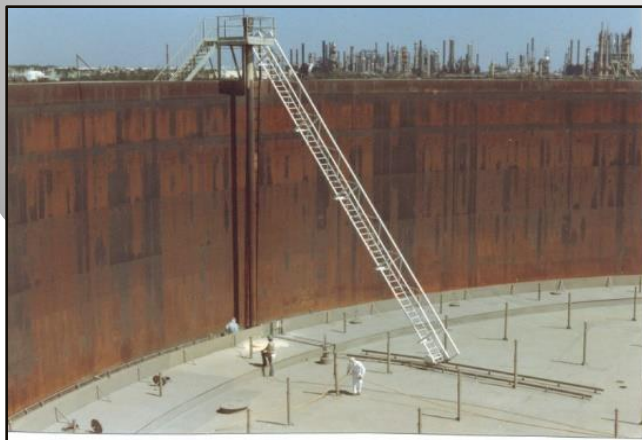

30075 County Road 49, Loxley, AL 36551

Phone: 251-964-7911

email: info@gulfcoastpaint.com

www.gulfcoastpaint.com

GULF COAST PAINT MFG., INC.

Key Products for Containment Areas

PC-555, PC-1500



PC-1500 Epoxy Novolac

- ❑ 100% Solids, No odor or V.O.C.
- ❑ Designed for use in splash and spillage of 98% Sulfuric Acid and 37% HCL
- ❑ Outstanding resistance to acids, alkalis, and most industrial chemicals and many solvents

PC-555 Epoxy Novolac

- ❑ 82% Solids, Low V.O.C.
- ❑ Designed for use in splash and spillage of 98% Sulfuric Acid and 37% HCL
- ❑ Outstanding resistance to acids, alkalis, and most industrial chemicals and many solvents
- ❑ Can be sprayed, brushed or rolled on vertical & horizontal surfaces



30075 County Road 49, Loxley, AL 36551

Phone: 251-964-7911

email: info@gulfcoastpaint.com

www.gulfcoastpaint.com